


### FEATURES

- Weight: 0.6 kg.
- Enclosure:
  - Cover: Die cast, Aluminum Alloy, ASTM B85 A04130.
  - Finish: Red powder coat.
  - Base: Die cast, Aluminum Alloy, ASTM B85 A04130.
  - All parts have corrosion resistant finishes.
- Cover tamper:
  - Tamper resistant screws.
  - Cover tamper switch available.
  - 3 AMPS / 5 AMPS at 125/250 VAC.
- Contact Ratings:
  - CF-OSYSU-1: one set of SPDT.
  - CF-OSYSU-2: two sets of SPDT.
  - 10 AMPS at 125/250 VAC.
  - 2.5 AMPS at 30 voh resistive.
- Conduit Entrances:
  - One knockout and one hole for 1/2" conduit provided.
- Service Use: NFPA 13, 13D, 13R, 72.
- IP 67.



### SCHEMATIC & DIMENSIONS (MM/ INCH)

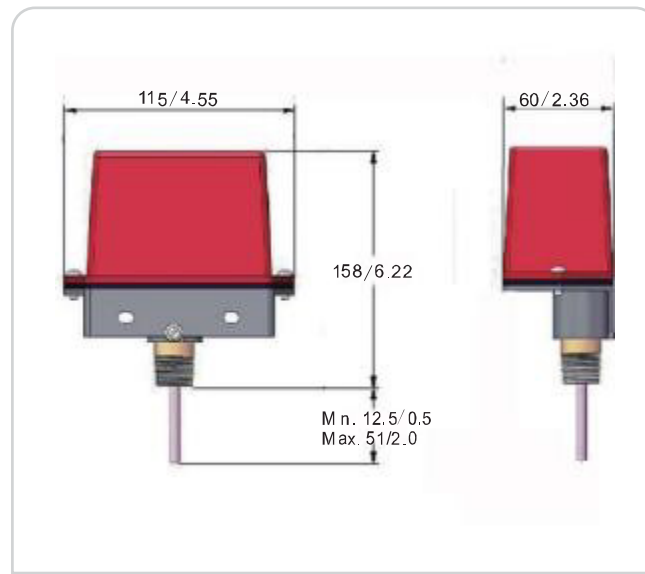

**Note:**  
Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.